

ARMY RESEARCH LABORATORY



A Study of Power Diode
Failure Mechanisms in the
U.S. Army Research Laboratory
30-mm Solid Propellant
Electrothermal-Chemical (SPETC)
Gun Facility

Gary L. Katulka
Kevin J. White

ARL-TR-698

February 1995



APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

19950222 026

NOTICES

Destroy this report when it is no longer needed. DO NOT return it to the originator.

Additional copies of this report may be obtained from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Road, Springfield, VA 22161.

The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The use of trade names or manufacturers' names in this report does not constitute endorsement of any commercial product.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE February 1995		3. REPORT TYPE AND DATES COVERED Final, April 1993-September 1994
4. TITLE AND SUBTITLE A Study of Power Diode Failure Mechanisms in the U.S. Army Research Laboratory 30-mm Solid Propellant Electrothermal-Chemical (SPETC) Gun Facility			5. FUNDING NUMBERS PR: 1L162618AH80	
6. AUTHOR(S) Gary L. Katulka and Kevin J. White				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRL-WT-PA Aberdeen Proving Ground, MD 21005-5066			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRL-OP-AP-L Aberdeen Proving Ground, MD 21005-5066			10. SPONSORING/MONITORING AGENCY REPORT NUMBER ARL-TR-698	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited. DTIC QUALITY INSPECTED			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) Experiments have been performed with a 100-kJ Pulse Forming Network (PFN) at the U.S. Army Research Laboratory (ARL) for the purpose of characterizing semiconductor diodes which serve as capacitor-protecting crowbar devices. These devices are viewed as critical electronic power components required for electric gun research that is currently in progress within the U.S. Army and elsewhere. As part of this study, computer techniques were used to refine and develop the understanding of the dynamic, or switching, behavior of PFN diodes. In combination with experimental results, the computer simulations helped to define particular conditions within a given electric gun system that can cause vulnerable or stressful situations for the semiconductor devices under test. It was determined from analyses of the various data collected, that when operated in a PFN under specific loading conditions (simulated here with fixed resistive loads), diodes are subject to transient or high frequency voltage peaks. In some experimental cases at the ARL, the magnitude of the rate of change in voltage (dV/dt) across the devices was such that catastrophic failure was observed. The details of the boundary conditions necessary for device failure are described and several solutions that will circumvent operational problems including device grouping, choice of diode reverse recovery time, and selection of capacitive and inductive circuit parameters are discussed in detail. Background information describing some fundamental physics of semiconductor diodes and their role in electrothermal-chemical (ETC) propulsion technology is provided first.				
14. SUBJECT TERMS electrothermal-chemical, power diodes, solid propellants, diodes			15. NUMBER OF PAGES 31	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL	

INTENTIONALLY LEFT BLANK.

ACKNOWLEDGMENTS

The authors extend their thanks to the reviewers of this work, Dr. Larry Kingsley and Dr. Thomas Kottke, both of the U.S. Army Research Laboratory (ARL). Thanks is also owed to Mr. Henry Burden, Dynamic Science Inc., and Dr. James Kolodzey, the University of Delaware Electrical Engineering Department, for their many helpful discussions and suggestions.

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution	
Availability Codes	
Dist	Avail and/or Special
A-1	

INTENTIONALLY LEFT BLANK.

TABLE OF CONTENTS

	<u>Page</u>
ACKNOWLEDGMENTS	iii
LIST OF FIGURES	vii
1. INTRODUCTION	1
2. EXPERIMENTAL APPROACH	7
3. SUMMARY AND CONCLUSIONS	14
4. FUTURE WORK	15
5. REFERENCES	17
DISTRIBUTION LIST	19

INTENTIONALLY LEFT BLANK.

LIST OF FIGURES

<u>Figure</u>	<u>Page</u>
1. Typical reverse recovery behavior of a diode	3
2. Variation of depletion region thickness with applied bias	6
3. Circuit diagram for 100-kJ PFN used for electric gun applications	7
4. Diode current measurements for 100-m Ω load	8
5. Diode voltage measurement with 100-m Ω load	8
6. Computer simulation of current-dependent plasma load	9
7. Rate of change in diode voltage (dV/dt) vs. PFN system voltage	11
8. Current and voltage of first submodule diode in delayed discharge	12
9. Current and voltage of first submodule with 800- μ f capacitance	13
10. Current and voltage of first submodule with 1,600- μ f capacitance	13
11. Effect of varied inductances in the diode path	14

INTENTIONALLY LEFT BLANK.

1. INTRODUCTION

It is of critical importance to offer voltage reversal protection in pulsed power systems since most energy storage capacitors are sensitive to, and can be damaged by, swinging or oscillating voltages (Sarjeant 1990). Semiconductor diodes are used in pulsed power systems as shunt rectifying devices that protect energy storage capacitors from voltage reversals. The presence of silicon diodes has a strong effect on the pulse-shaping characteristics of a given power system, and, in some cases, they can contribute toward an overall increased electrical efficiency of the system. Diodes are successfully used as pulse power components in several facilities currently involved in electric gun research at the U.S. Army Research Laboratory (ARL) and in several other research organizations (Grater 1994; Hammon, Bhasavanich, and Warren 1991; Oberle and Wren 1994; Rhinehart, McGowan, and Singh 1990; Weise et al. 1993; White et al. 1994; Wofford, Baker, and Day 1991). The end result is a decrease in operational lifetime for capacitors that are allowed to oscillate in a pulse forming network (PFN). Since they are basically used as a shorting path across the capacitors during a voltage reversal, semiconductor diodes are usually referred to as "crowbar" diodes, where they clamp or "crowbar" the capacitors for the duration of a reversal cycle.

It should be noted that other techniques have been developed that can effectively produce the same crowbarring action without the direct use of solid-state devices (Merger et al. 1990). Some of these systems take advantage of high current ignition switches, liquid mercury devices that require considerable volume within the power system. There is also additional control circuitry needed for proper timing of an ignition switch that can be made exterior to the PFN.

Hence, there is an obvious attraction to a self-reliant, solid-state switch that requires minimal volume and hardware for the PFN designer. The bad news is that semiconductor devices are destroyed when too much current (heat) is allowed to penetrate their junction. Damage occurs as a result of excessive junction temperature caused by ohmic heating, which leads to increased device conductivity; this results in additional current flow and further temperature increases. The conductivity is directly proportional to the concentration of mobile current carries in the device, and is itself a function of operating temperature. The relationships between conductivity (σ_i) and mobile carrier concentration (n_i), and carrier concentration and temperature are given, respectively, in equations 1 and 2.

$$\sigma_i = q (\mu_n + \mu_p) n_i \quad (1)$$

$$n_i(T) = 3.88 \times 10^{16} T^{3/2} \exp(-7000/T) \text{ cm}^{-3} \text{ (for silicon above 50 K)} \quad (2)$$

where, q represents the charge on an electron and μ_n and μ_p are the electron and hole mobilities.

As the energy of the valence electrons is increased due to the additional thermal energy, more electrons are excited to the conduction band of the material, which result in a structure that conducts current more freely (Tyagi 1991). If the material is not allowed to dissipate the additional heat quickly enough, this process will continue until the melting point of the device is reached and ultimately destroyed. This condition is often referred to as "thermal runaway."

- Diode Reverse Recovery Time (t_{rr}). For pulsed power applications where switching is utilized, as in electric gun systems, the t_{rr} of the semiconductor diode is an important parameter for consideration. The t_{rr} is that time required for the diode to switch from an "on" or conducting state to "off" or high impedance state. This parameter is a function of two quantities, namely, junction capacitance (C_j) and the minority carrier lifetime (t_p) of the semiconductor device (for long base diodes) or the transit time of the minority carriers (short base diodes). A diode is considered short base when the diode's neutral base width (W_n) is less than the diffusion length (L). The frequency response of the overall electrical network is directly limited by the t_{rr} of the device in which it operates. So, for fast switching applications, it is a requirement that the recovery time be kept as small as possible (Sze 1985).

The t_{rr} consists of the time associated with the minority carrier concentration at the depletion edge (t_s) and a "fall" time component (t_f) due to capacitive storage of minority carriers throughout the depletion region. This is expressed in equation 3 and illustrated by Figure 1.

$$t_{rr} = t_s + t_f \quad (3)$$

For long base diodes, where the neutral region is large, t_s is effectively the minority carrier lifetime (t_p) for the bulk material. The minority carrier lifetime is a result of three electron-hole recombination processes. These are direct band-to-band (radiative) recombination, indirect recombination due to carrier traps in the energy band gap (Schockley, Hall, Read or SHR recombination) and a three particle process known as Auger recombination. In general, the minority carrier lifetime can be increased by increasing the carrier traps or defects in the semiconductor crystal (this is accomplished through a process known as

electron bombardment), but the tradeoff is an increase in the reverse saturation current (current flow in reverse bias mode) of the device (Tyagi 1991). This is seen as a practical disadvantage with regards to PFN operation since energy storage capacitors will discharge faster having diodes of higher reverse saturation current. A typical reverse recovery current waveform for a *pn* junction diode is shown in Figure 1.

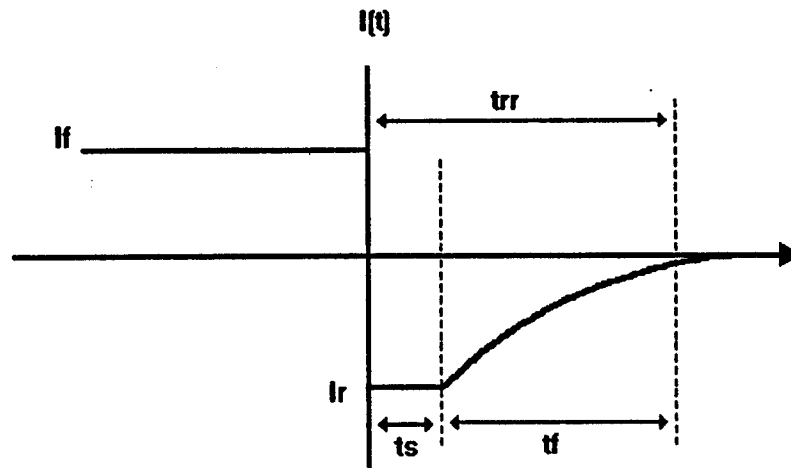


Figure 1. Typical reverse recovery behavior of a diode.

In some instances, the transit time of the carriers is smaller than the carrier lifetime. This is true for "short base" diodes that have a narrow base width and are much faster in terms of recovery time. For this case, the current due to the diffusion of carriers in a sample of material (either electrons or holes) is given by

$$I = q D \frac{dP_o}{dx} A_j \quad (4)$$

or, alternatively, for a short base diode,

$$I = (q D P_o A_j) / W_n \quad (5)$$

where

q = electronic charge = 1.602×10^{-19} C

D = diffusion coefficient of material (cm^2/s)

P_o = excess carrier concentration (cm^{-3})

A_j = junction area of the device (cm^2)

W_n = width of the device neutral region (cm)

Given that the minority carrier charge, which must be removed during this "fall" time, is

$$Q = A_j q P_o W_n/2, \quad (6)$$

and the current expressed as a function of the charge due to minority carriers with respect to time is

$$I = Q/t, \quad (7)$$

then the result of replacing the expression for current in equation 7 with that from equation 5, combining with equation 6 and solving for time, gives

$$t = t_s = Q/I = (A_j q P_o W_n/2) / (q D P_o A_j / W_n) \quad (8)$$

$$t_s = 1/2 (W_n^2/D), \quad (9)$$

where t_s is referred to as the transit time of the device. It is interesting to note that the value of t_s can be made smaller than the carrier lifetime of the bulk material with obvious adjustments in the base width and diffusion coefficient. For example, for short base diodes, it is generally required that the base width be on the order of the diffusion length (L), which is the square root of the diffusion coefficient (D) multiplied by the carrier lifetime (t_p). Assuming that the base width in equation 9 is equal to the diffusion length, the resulting transit time through the base is twice as fast as that of the carrier lifetime. This represents a substantial improvement in device speed. The diffusion coefficient is a function of carrier mobility, a basic property of semiconductors, and it is desirable to have a large mobility material (such as GaAs) as necessary to obtain a fast device; and, as just demonstrated, narrow base width diodes are preferred due to their improved recovery time. So, with respect to high-speed devices, the semiconductor

material type and diode geometry are of significant importance and should not be overlooked. It should be stressed that the tradeoff in using a fast recovery device is that of lower breakdown voltage. This results from the smaller available depletion width, which effectively lowers the voltage capability of the device and forces the use of multiple diodes in series. This is a situation that tends to be bulky and expensive, as will be discussed later in this report.

If the diode's t_{rr} are incompatible with the requirements or capabilities of a PFN, it is possible for electrical breakdown to occur in the semiconductor junction (Katulka et al. 1991). It should be noted that the capabilities of an electric gun PFN are variable, by design, such that the diode t_{rr} may be shorter than required for one set of boundary conditions and marginal or even inadequate (as will be shown later in the report) for others. It is recommended that care be exercised when selecting semiconductor diodes for pulsed power applications of this nature. Figure 2 shows how the thickness of diode junction depletion region varies with applied voltage. The depletion region with (W), as seen in Figure 2, is given by the following relation.

$$W = [(2\epsilon_s/q)\{(1/N_a) + (1/N_d)\}\{V\}]^{1/2} \quad (10)$$

where,

ϵ_s = semiconductor permittivity (F/cm)

q = electronic charge (C)

N_a = acceptor impurity concentration (cm⁻³)

N_d = donor impurity concentration (cm⁻³)

V = junction voltage (reverse bias).

As indicated by equation 10, when a reverse bias is increased across the junction, the depletion region widens and the resulting maximum or critical electric field in the depletion region becomes larger. This enables the diode to have a relatively large value of reverse blocking voltage (typically several kilovolts for power diodes) and a relatively small forward voltage limit (usually a few volts). The amount of time required for the diode to switch between the forward and the reverse modes is dependent upon the time for the depletion region to reach its maximum width and is governed by the reverse recovery characteristics of the device, as discussed previously. Once again, if a voltage of appreciable magnitude is applied across the device junction faster than what is required for W to achieve a thickness wide enough

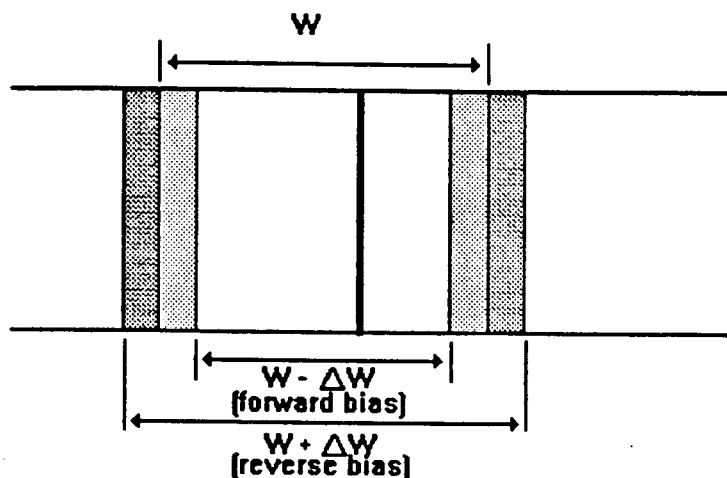


Figure 2. Variation of depletion region thickness with applied bias.

to avoid electrical breakdown, then the diode can be destroyed from internal breakdown through the junction.

The focus of this report deals with experiments and theoretical calculations that have been performed and analyzed at the ARL on a 100-kJ pulsed power supply used for electrothermal-chemical (ETC) gun research. The main area addressed is in characterizing the crowbar diodes' performance when exposed to high-voltage switching transients produced by the discharging of the PFN. This work was initiated in response to a series of electric gun firings in the 30-mm ETC gun facility, when several occurrences of diode failures (catastrophic in some cases) were encountered. The approach taken was to perform discharge experiments at low energy levels (to avoid further damage to the PFN) with fixed resistive loads while examining the current and voltage characteristics of the diodes. This was coupled with computer calculations of the PFN to further study the diodes. After validating the computer code by direct comparisons with experimental data, further calculations were performed to demonstrate the dependence of the rate of change in voltage (dV/dt) with respect to the PFN switch closure times, circuit capacitances, and series inductance in the diode conduction path.

The result of this work led to a better understanding of the physical processes involved in the pulsed power system relevant to crowbar diode operation, which are viewed as a critical power component for several types of electric gun research programs.

2. EXPERIMENTAL APPROACH

A schematic diagram of the PFN under consideration is given in Figure 3. In this case, the PFN consists of five triggerable submodules of capacitor banks that can be independently discharged through the ignition closing switches. This feature provides a level of flexibility to the electric gun researcher in that it allows the capability of multiple pulsed power profiles to the electric gun system (Katulka et al. 1991). The diode failure problems experienced during laboratory electric gun firings were found to occur in only the first submodule of the PFN; thus, indicating a nonuniform or unique pattern of power dissipation to the first submodule diodes. Semiconductor failure was observed for several gun firings and also in fixed load discharges using a 100-m Ω load resistance. This occurred at relatively high initial PFN energies on the order of 50 kJ for each discharge. As a result, efforts were focused on studying the current and voltage characteristics of this submodule's diode, at a reduced system energy, in comparison to the other diodes in the system. This work was performed with fixed-resistive load discharges and verified using computer techniques.

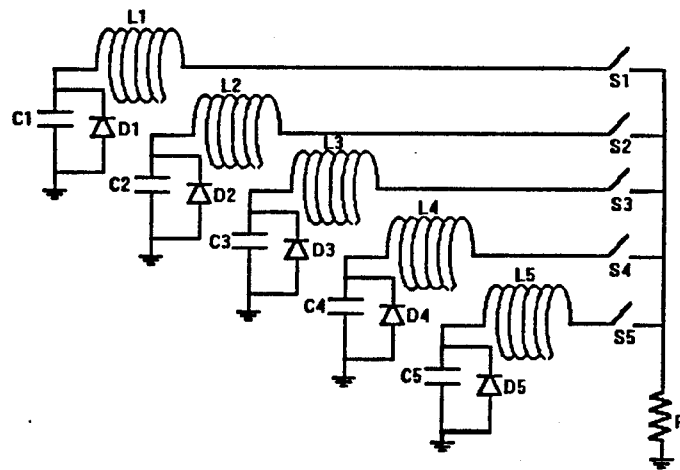


Figure 3. Circuit diagram for 100-kJ PFN used for electric gun applications.

Experiments were performed with PFN discharges into 35-, 100- and 200-m Ω load resistors. It was determined from experimental measurements of diode current and voltage that only for the case of the 100-m Ω load did a large dI/dt and dV/dt occur across the diode terminals in the first submodule. Experimental current and voltage waveforms as measured for this case are given in Figures 4 and 5 and

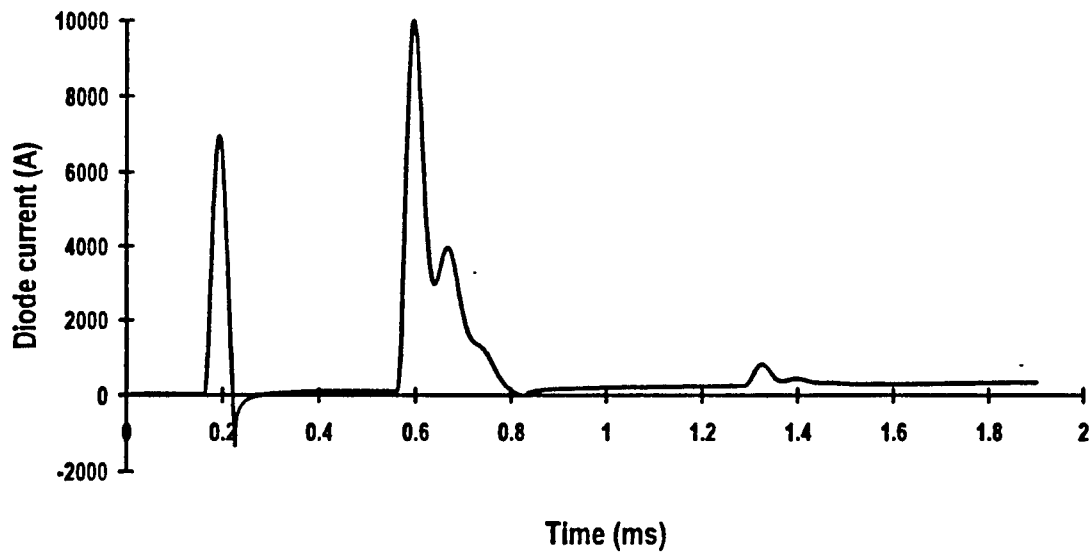


Figure 4. Diode current measurements for 100-m Ω load.

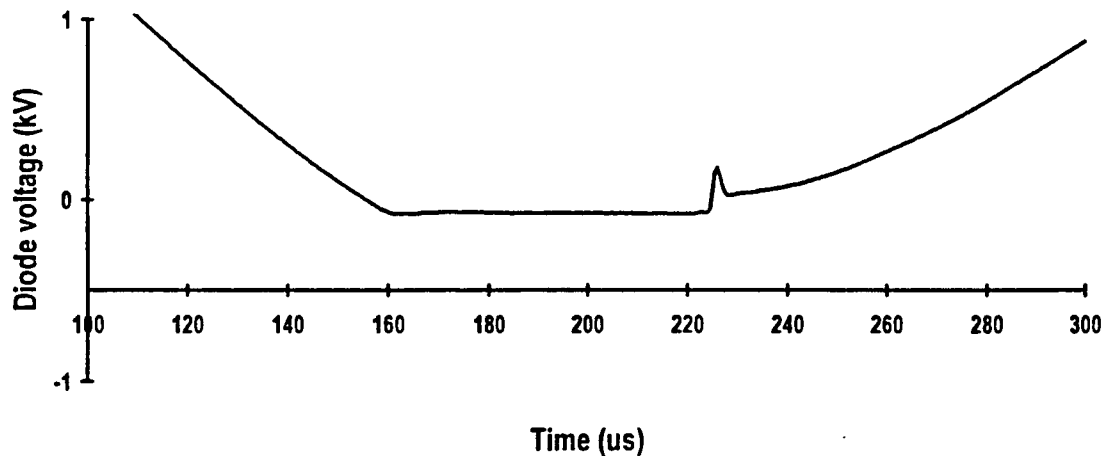


Figure 5. Diode voltage measurement with 100-m Ω load.

the transient waveforms can be seen at 226 μ s in time. These results were corroborated later with computer calculations, and it was also demonstrated that a large dV/dt (see Figure 6 at 280 μ s) was experienced on the first submodule diode with a current-depended plasma load computer simulation. The plasma load generally varies from 30 m Ω to hundreds of milliohms during the plasma functioning and the simulation results are given in Figure 6. The computer simulation shows that although the rate of change in current is smaller for the plasma case, the overall current magnitude is larger than the resistive

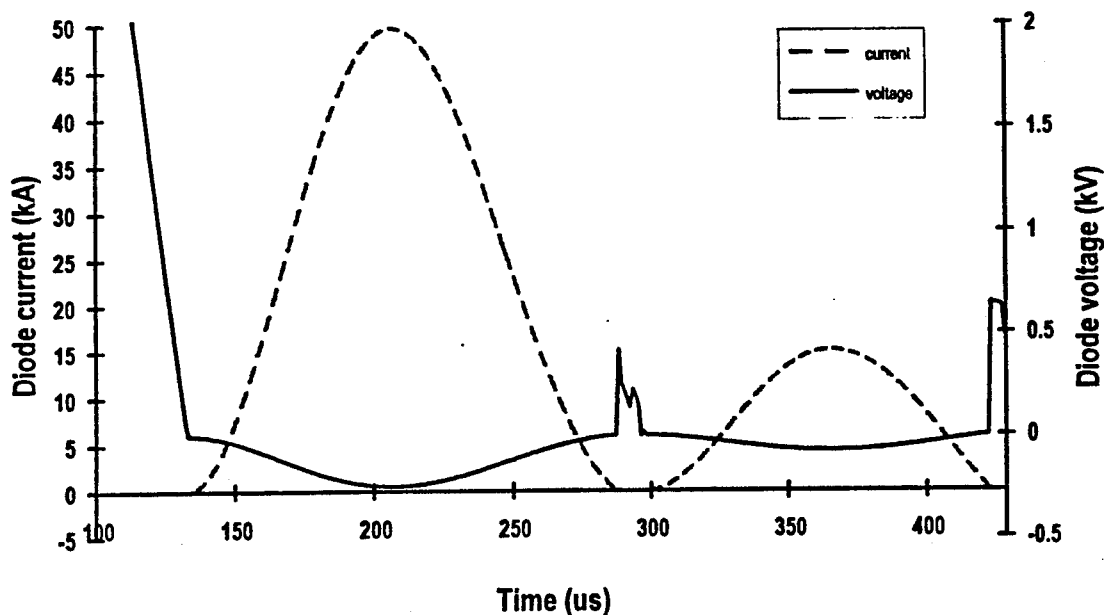


Figure 6. Computer simulation of current-dependent plasma load.

load case, indicating a greater impedance mismatch situation, and a large dV/dt is still evident. The large dV/dt is a possible cause of why diode failure was observed in some experimental gun firings where plasma loads are used. It is noted that for the 100-m Ω load case, the current waveform exhibits a small pulse of current over a 50- μ s period followed by a second pulse starting just before the 600- μ s point. However, it was of further interest to discover that the rate at which the current decreased through the device was extremely large. In one experiment, the maximum rate of change (dI/dt) for the decreasing current is calculated at 124.6 A/ μ s, which is the largest dI/dt for the three test cases considered here and the largest dI/dt for any of the five submodules of the PFN.

This is pointed out since large dI/dt 's can lead to overheating in semiconductors (as discussed earlier in the report) and they are also indicative of other potential problems such as large dV/dt 's. It is estimated that the t_{rr} of these diodes is on the order of 50 μ s, which when subject to the dI/dt of the 100-kJ PFN, will result in application of reverse voltage on a diode still in the forward biased mode (Rinaldi 1994). In other words, the diode cannot turn off as fast as the application of reverse voltage across its terminals occurs, and the result is an excessive reverse voltage applied to the diode terminals. In fact, direct measurements of the voltage across the diode junction (Figure 5) provide definite evidence that a fast pulse

of reverse voltage occurs across the diode as it is switching from the forward to reverse mode. It should be pointed out that this transient voltage occurs in spite of the fact that the diodes are placed directly in parallel with the 400- μf energy storage capacitors. As seen in Figure 5, a rapidly rising voltage is applied to the diode as current conduction ceases at approximately 226 μs in time. The dV/dt for this particular case is calculated at 127 $\text{V}/\mu\text{s}$. Here it is proposed that the diode's depletion region is still quite narrow, as it should be in forward bias when the PFN exerts a rapid reverse voltage across the junction ultimately causing voltage breakdown of the device. This will be true in general when the voltage capability of a forward biased diode, which is typically in the range of several volts, is reached and exceeded.

From additional studies, it was determined that the relationship between the magnitude of the dV/dt across the diode was a linear function with respect to the overall voltage (energy) of the PFN. This relationship was established by performing experiments with larger overall energy levels while continuing to measure diode voltages. The results of these experiments are shown in Figure 7. The data of Figure 7 can be used to evaluate the expected dV/dt for a given system voltage level and it is then possible to determine the safe operating area for these particular diodes with respect to maximum dV/dt . For instance, it was noted that during several high energy experiments where the system voltage was at 7-kV, and using the 100-m Ω load, diode failures were experienced repeatedly. This voltage level corresponds to the 300-V/ μs point on the curve in Figure 7. Once the characteristics of maximum dV/dt and t_{rr} of the crowbar diode are established, it becomes imperative that the PFN is of a design that will not exceed these parameters. A straightforward design method to be used to determine an adequate PFN configuration is through the use of a circuit analysis computer code that can characterize dynamic diode behavior. This approach has been taken on the PFN of Figure 3 and is discussed in the following section.

- Circuit Parameter Effects. The dependence of the switching transient applied to the diode in the first submodule, and other submodules, with respect to PFN closing switch times, submodule capacitance, and series inductance were studied further with a basic electronic circuit analysis code (Microcap III). It was determined that in the presently configured PFN (Figure 3), the relatively small value of submodule capacitance in the first bank, 400 μf , coupled with the other submodules discharging relatively quickly after the first, ultimately caused the rapid decrease in diode current of the first submodule. This resulted in a large dI/dt and subsequent large dV/dt once diode conduction ceased. The submodules 1 through 5 begin discharging at 0, 40, 80, 120, and 180 μs , respectively. The combination of the 400- μf capacitance with the submodule inductance and series resistance produce an effective capacitor discharge time of 165 μs . When the diode stops conducting current, the series inductance in the buswork surrounding the

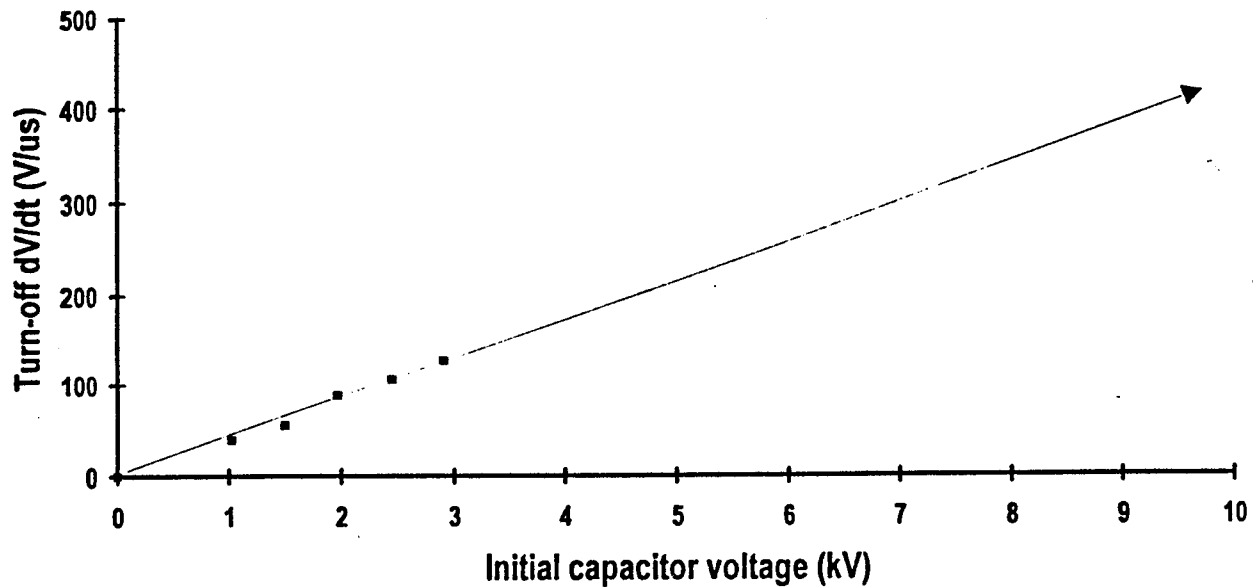


Figure 7. Rate of change in diode voltage (dV/dt) vs. PFN system voltage.

diode immediately produces a transient voltage (dV/dt) that is responsible for diode destruction as described in the previous section. The results of these calculations are given in the plot of current and voltage in Figure 6, where an initial voltage of 10-kV (maximum system voltage) is assumed for the PFN. The calculations reliably predict the transient voltage waveform—specifically the dV/dt across the diode terminals at approximately 226 μs into the discharge cycle. It was determined from other computer calculations that the effect of the submodules beginning discharge at 80, 120 and 180 μs are responsible for the abrupt current turn off, and also magnitude of dV/dt , on the first submodule's diode. That is, as the current is exponentially decaying in the diode, the final three submodules are switched into the network and substantially increase the voltage across the load. This forces an increased dI/dt through the inductor and diode of the first submodule that drives the current to zero (Katulka et al. 1991). The realization of this condition brings about one solution to the dV/dt problem as expanding the overall pulse width by discharging the last three submodules after the completion of the initial submodules diode conduction.

A computer calculation with this modification is given in Figure 8, where two submodules are fired 400 μs after the initial submodule. In general, to completely avoid an increased diode dI/dt of any submodule, no subsequent submodule should be discharging while a preceding submodule diode is conducting. The main difficulty here is that the system is now limited as to the length of the power pulse

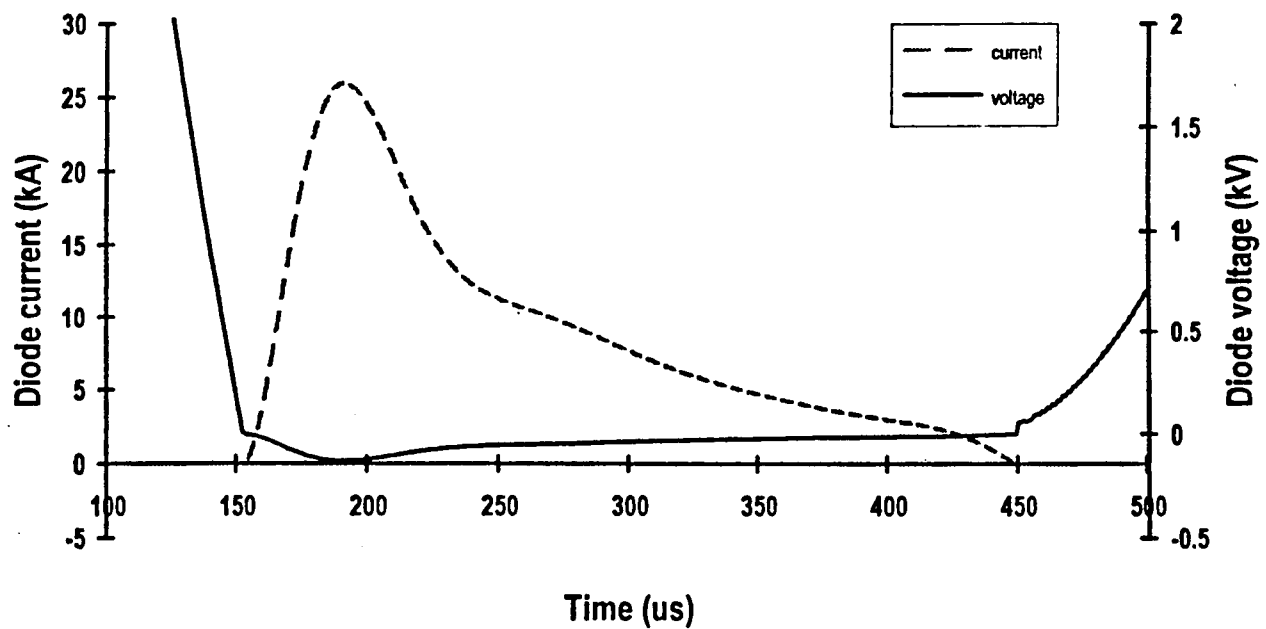


Figure 8. Current and voltage of first submodule diode in delayed discharge.

width that can be produced by the PFN. This is an extremely confining solution to the dV/dt problem in terms of pulse power flexibility and is not a very attractive solution if pulse shaping is a necessity.

Further calculations were performed with the PFN discharges in which the total capacitance in the first submodule was varied in an effort to minimize the magnitude of the diode dV/dt . These results are shown in Figures 9 and 10 where the capacitance of the first submodule is increased from 400 μf in Figure 6 (the standard used in the PFN), to 800 μf in Figure 9, and 1,600 μf in Figure 10. It is noticed that the increase in capacitance is quite effective in eliminating the dV/dt on the diode. The problem with this approach is that the total energy of the first submodule is now increased by a factor of 4, the PFN output power by about 30%, and the total pulse width of the first submodule is now twice as large as in the initial case. This solution may not be problematic if the pulse width and other complications can be tolerated, and if the voltage on the first submodule can be reduced to deal with the added capacitive energy and power from the first submodule.

The final area of investigation was in the study of the effects of the series inductance of the first submodule diode conduction path. The results of computer calculations where this inductance was varied from 1.8 μH to 0.4 μH are given in Figure 11. It becomes clear that minimal inductance, experimentally realized by keeping buswork lengths to a minimum, will have a very large impact on the reduction of the diode dV/dt . This approach may be difficult to implement in practice, but is extremely attractive since

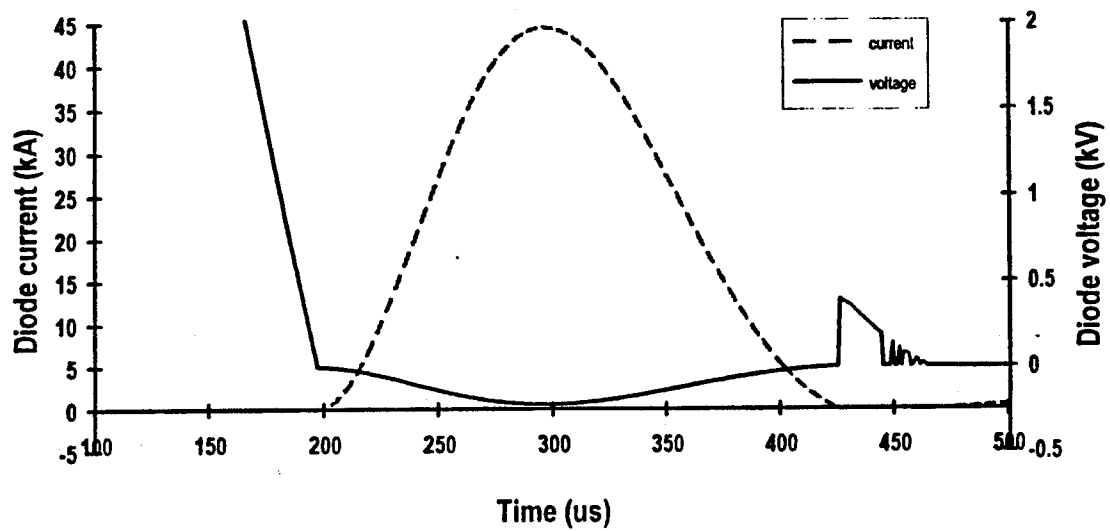


Figure 9. Current and voltage of first submodule with 800-μf capacitance.

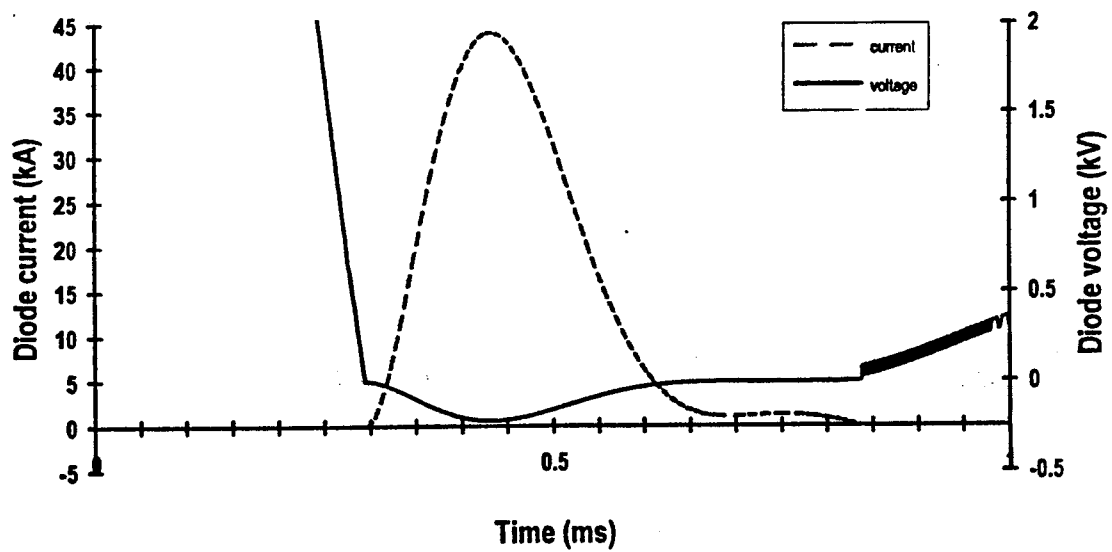


Figure 10. Current and voltage of first submodule with 1600-μf capacitance.

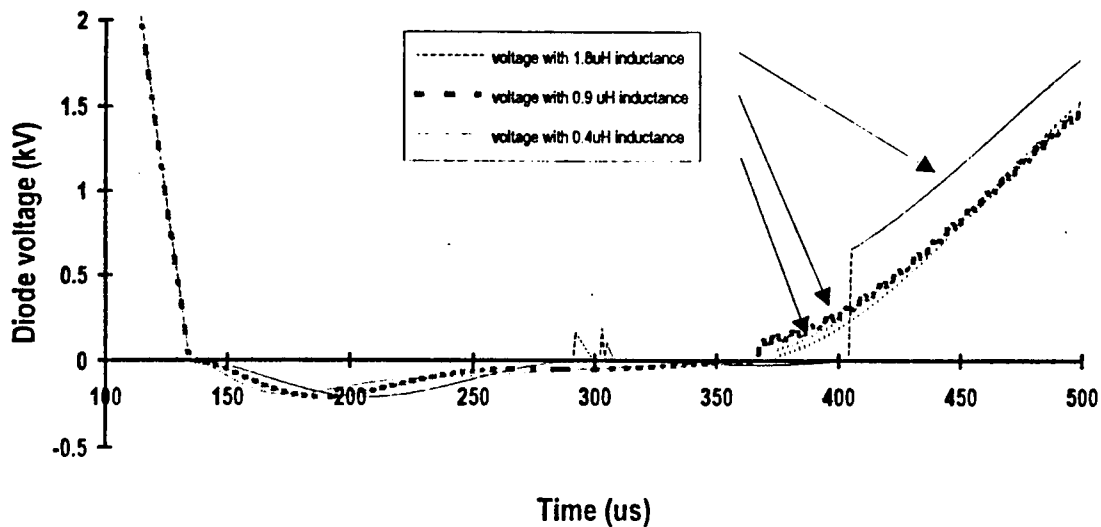


Figure 11. Effect of varied inductances in the diode path.

any series inductance in the diode path is not necessary for proper PFN operation and will primarily serve to introduce rapidly changing voltages as demonstrated by the experimental measurements and calculations shown here.

3. SUMMARY AND CONCLUSIONS

It has been shown through a variety of experimental measurements and computer calculations that the crowbar diodes of a PFN currently used for electric gun applications are subject to rapidly changing voltage signals (dV/dt 's) that resulted in catastrophic diode failures in experiments involving both plasma and resistive loads. It was determined that when crowbar diodes are protected by PFN capacitors, unwanted series inductances can still produce rapidly changing voltage signals that can exceed the t_{rr} and voltage limits (dV/dt) of the semiconductor devices. An identifiable solution to overcome the dV/dt problem is to use only fast recovery diodes that are capable of tolerating fast reverse voltages offered by the discharging PFN. Short base diodes having high carrier mobilities will offer faster turn off times and should be considered for switching applications as encountered for electric gun research. This approach will likely increase the size, volume, and cost of the overall PFN since faster diodes tend to have decreased voltage capabilities, will require more devices in series, and are generally more expensive than slower-acting devices. Alternatively, the PFN pulse width can be increased such that only subsequent

submodules are discharged only after diode conduction has ceased in the preceding submodules. This will also impose limits on the minimum pulse width obtainable for a given PFN.

It has been demonstrated that further protection of diodes from dV/dt 's is possible through an increase in the capacitance surrounding each crowbar diode. This is considered a practical solution to the dV/dt problem as long as the capacitance used for protection is within the limits of system energy, power, and pulse width constraints.

Also, it was illustrated that by reducing series inductances in diode paths, a direct reduction in the ability of the discharge circuit to produce unwanted transient voltages across diode junctions will result. It may be best to consider as many approaches as possible and apply the benefits of each of the techniques that have been considered here in terms of realizing a PFN that is capable of producing a variety of pulse shapes, one that has a high electrical efficiency, remains robust, compact, and is also practical to construct.

Finally, it should be stressed that the use of computer techniques and calculations can provide an effective method of clarifying or characterizing the dynamic behavior of pulsed power systems as necessary to establish safe operating regions for associated pulsed power hardware. By adopting such techniques, situations that exceed the threshold of properly operating devices can be identified and avoided, and the time and effort of designing and analyzing pulsed power systems will be spent more efficiently.

4. FUTURE WORK

It became apparent as the work detailed here progressed that the semiconductor diode requirements used for this application of PFN's involve specialized semiconductor devices. Many of the power rectifiers available and in use today are geared more toward lower frequency applications as opposed to pulsed power as in electric gun research. This is not to say that these devices cannot be adapted to perform reliably in all pulsed power systems. However, as previously illustrated in this report, the unique application of diodes in electric gun power supplies, that rely on multiple stages and switching of network elements, do require devices with large current capabilities, high voltage ratings, and adequate recovery times. The general trend for fast recovery diodes is in the direction of lower voltage blocking limits, which is in conflict with the high voltage requirements found in systems of this nature. As a result,

potential areas for further work exist in terms of providing the optimal semiconductor device, and this may include the usage of new high-speed materials or novel semiconductor diode geometries.

5. REFERENCES

- Grater, G., "Navy ETC Gun Technology Program." 21st International Power Modulator Symposium, Costa Mesa, CA, June 1994.
- Hammon, H., D. Bhasavanich, and T. Warren. "Design Approaches to Pulsed Power Drivers for Electromagnetic and Electrothermal Gun Systems." 8th IEEE International Pulsed Power Conference, San Diego, CA, 1991.
- Katulka, G., Burden, K. White, and A. Zielinski. "Electrical Energy Shaping For Ballistic Applications in Electrothermal-Chemical Guns." 27th JANNAF Combustion Subcommittee Meeting, F. E. Warren AFB, Cheyenne, WY, November 1990. Also Proceedings of the 8th IEEE International Pulsed Power Conference, San Diego, CA, 1991.
- Katulka, G., T. Khong, and K. White. "Plasma Characterization for Electrothermal-Chemical Gun Applications." 30th JANNAF Combustion Subcommittee Meeting, Hyatt Regency Hotel, Monterey, CA, November 1993.
- Merger, R., R. Ford, D. Jenkins, W. Lupton, and I. Vitkovitsky. "Navy Research into Pulsed Driven Electrothermal Reactions." 27th JANNAF Combustion Subcommittee Meeting, F. E. Warren AFB, Cheyenne, WY, November 1990.
- Oberle, W., and G. Wren. "Applicability of Electrothermal-Chemical Propulsion Concepts to Tactical Army Applications." 19th Army Science Conference, Orlando, FL, June 1994.
- Rhinehart, H., J. McGowan, and H. Singh. "A 6.6 MJ Modulator for Electrothermal Chemical Guns." 19th International Power Modulator Symposium, San Diego, CA, June 1990.
- Rinaldi, V. Private communication. June 1994.
- Sarjeant, W. "Capacitors." IEEE Transactions on Electrical Insulation, vol. 25 no. 5, p. 892, October 1990.
- Sze, S. M. Semiconductor Devices Physics and Technology. New York, NY: John Wiley and Sons, pp. 110-111, 1985.
- Tyagi, M. S. Introduction to Semiconductor Materials and Devices. New York, NY: John Wiley and Sons, 1991.
- Weise, T., F. Schumuck, S. Jungblut, and G. Hammon. "Feuerstelling 2000: A 30 MJ Capacitive Power Supply for the Franco-German Electric Gun Program." 9th IEEE International Pulsed Power Conference, Albuquerque, NM, June 1993.
- White, K., W. Oberle, A. Juhasz, I. Stobie, K. Nekula, G. Katulka, and S. Driesen. "Electrothermal-Chemical Propulsion with High Loading Density Charges." 19th Army Science Conference, Orlando, FL, June 1994.

Wofford, M., M. Baker, and M. Day. "Design, Simulation, and Testing of a Pulse Forming Network-Transformer Power Supply for the Texas Tech Railgun." 8th IEEE International Pulsed Power Conference, San Diego, CA, 1991.

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>	<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
2	ADMINISTRATOR ATTN DTIC DDA DEFENSE TECHNICAL INFO CTR CAMERON STATION ALEXANDRIA VA 22304-6145	1	COMMANDER ATTN AMSMI RD CS R DOC US ARMY MISSILE COMMAND REDSTONE ARSNL AL 35898-5010
1	COMMANDER ATTN AMCAM US ARMY MATERIEL COMMAND 5001 EISENHOWER AVE ALEXANDRIA VA 22333-0001	1	COMMANDER ATTN AMSTA JSK ARMOR ENG BR US ARMY TANK AUTOMOTIVE CMD WARREN MI 48397-5000
1	DIRECTOR ATTN AMSRL OP SD TA US ARMY RESEARCH LAB 2800 POWDER MILL RD ADELPHI MD 20783-1145	1	DIRECTOR ATTN ATRC WSR USA TRADOC ANALYSIS CMD WSMR NM 88002-5502
3	DIRECTOR ATTN AMSRL OP SD TL US ARMY RESEARCH LAB 2800 POWDER MILL RD ADELPHI MD 20783-1145	1	COMMANDANT ATTN ATSH CD SECURITY MGR US ARMY INFANTRY SCHOOL FT BENNING GA 31905-5660
1	DIRECTOR ATTN AMSRL OP SD TP US ARMY RESEARCH LAB 2800 POWDER MILL RD ADELPHI MD 20783-1145		<u>ABERDEEN PROVING GROUND</u>
2	COMMANDER ATTN SMCAR TDC US ARMY ARDEC PCTNY ARSNL NJ 07806-5000	2	DIR USAMSAA ATTN AMXSY D AMXSY MP H COHEN
1	DIRECTOR ATTN SMCAR CCB TL BENET LABORATORIES ARSENAL STREET WATERVLIET NY 12189-4050	1	CDR USATECOM ATTN AMSTE TC
1	DIR USA ADVANCED SYSTEMS ATTN AMSAT R NR MS 219 1 R&A OFC AMES RESEARCH CENTER MOFFETT FLD CA 94035-1000	1	DIR USAERDEC ATTN SCBRD RT
		1	CDR USACBDCOM ATTN AMSCB CII
		1	DIR USARL ATTN AMSRL SL I
		5	DIR USARL ATTN AMSRL OP AP L

NO. OF
COPIES ORGANIZATION

1 OSD/SDIO/IST
ATTN DR LEN CAVENY
PENTAGON
WASH DC 20301-7100

1 CDR US ARMY ARDEC
ATTN SMCAR QAH T
MR JOHN DOMEN
BLDG 62 NORTH
PCNTY ARSNL NJ 07806-5000

1 CDR US ARMY ARDEC
ATTN SMCAR AEE BR
MR KEN KLINGAMAN
BLDG 1501
PCNTY ARSNL NJ 07806-5000

1 CDR US ARMY ARDEC
ATTN SMCAR ASI
DR JERRY RUBIN
PCNTY ARSNL NJ 07806-5000

1 DIR US ARMY BMD
ADV TECH CTR
PO BOX 1500
HUNTSVILLE AL 35807

1 CHAIRMAN
DOD EXPLOSIVES SFTY BOARD
RM 856 C HOFFMAN BLDG 1
2461 EISENHOWER AVE
ALEXANDRIA VA 22331-0600

1 DA OFC OF THE PRODUCT MGR
155 MM HOWITZER PALADIN
ATTN SFAE AR HIP IP
MR R DE KLEINE
PCNTY ARSNL NJ 07806-5000

1 CDR US ARMY CECOM
R&D TECH LIBRARY
ATTN ASQNC ELC IS L R
MYER CTR
FT MONMOUTH NJ 07703-5301

1 PEO ARMAMENTS PROJECT MGR
TMAS
ATTN AMCPM TMA
K RUSSELL
PCNTY ARSNL NJ 07806-5000

NO. OF
COPIES ORGANIZATION

1 PEO ARMAMENTS PROJECT MGR
TMAS
ATTN AMCPM TMA 105
PCNTY ARSNL NJ 07806-5000

1 PEO ARMAMENTS PROJECT MGR
TMAS
ATTN AMCPM TMA 120
PCNTY ARSNL NJ 07806-5000

1 CDR US ARMY ARDEC
PRODUCTION BASE MOD AGENCY
ATTN AMSMC PBM E
L LAIBSON
PCNTY ARSNL NJ 07806-5000

5 DIR BENET LABS
US ARMY WATERVLIET ARSNL
ATTN SARWV RD
G CARAFANO
R THIERRY
R HASOENBEIN
P VOTIS
P ALTO
WATERVLIET NY 12189

3 CDR US ARMY AMCCOM
ATTN AMSMC IRC
G COWAN
SMCAR ESM(R)
W FORTUNE
R ZASTROW
ROCK ISLAND IL 61299-7300

1 CMDT
US ARMY AVIATION SCHOOL
ATTN AVIATION AGENCY
FT RUCKER AL 36360

1 DIR
HQ TRAC RPD
ATTN ATCD MA
MAJ WILLIAMS
FT MONROE VA 23651-5143

1 HQ USAMC
ATTN AMCICP AD
MICHAEL F FISETTE
5001 EISENHOWER AVE
ALEXANDRIA VA 22333-0001

NO. OF
COPIES ORGANIZATION

1 CDR US ARMY ARDEC
ATTN SMCAR CCD
D SPRING
PCNTY ARSNL NJ 07806-5000

1 CDR US ARMY ARDEC
ATTN SMCAR CCS
PCNTY ARSNL NJ 07806-5000

1 CDR US ARMY ARDEC
ATTN SMCAR CCH T
L ROSENDORF
PCNTY ARSNL NJ 07806-5000

1 CDR US ARMY ARDEC
ATTN SMCAR CCH V
E FENNELL
PCNTY ARSNL NJ 07806-5000

1 CDR US ARMY ARDEC
ATTN SMCAR AE J PICARD
PCNTY ARSNL NJ 07806-5000

1 CDR US ARMY ARDEC
ATTN SMCAR AEE J LANNON
PCNTY ARSNL NJ 07806-5000

5 CDR US ARMY ARDEC
ATTN SMCAR AEE B
A BEARDELL
D DOWNS
S EINSTEIN
A BRACUTI
D CHIU
PCNTY ARSNL NJ 07806-5000

1 CDR US ARMY ARDEC
ATTN SMCAR AES
S KAPLOWITZ
PCNTY ARSNL NJ 07806-5000

1 CDR US ARMY ARDEC
ATTN SMCAR FSA T
M SALSBUY
PCNTY ARSNL NJ 07806-5000

NO. OF
COPIES ORGANIZATION

6 CDR US ARMY ARDEC
ATTN SMCAR FSE
T GORA
B KNUTELSKY
K C PAN
W DAVIS
C DURHAM
A GRAF
PCNTY ARSNL NJ 07806-5000

6 CDR US ARMY ARDEC
ATTN SMCAR EG
G FERDINAND
H NABER LIBBY
R LUNDBERG
J NILES
R MOREIRA
W MORELLI
PCNTY ARSNL NJ 07806-5000

3 US ARMY RSCH LAB
ATTN AMSRL EP MC
DR D SINGH
DR T POLDESAK
MR R PASTORE
DR L KINGSLEY
BLDG 2707
FT MONMOUTH NJ 07703-5000

2 CDR US ARMY RSCH OFC
ATTN TECH LIBRARY
D MANN
PO BOX 12211
RSCH TRI PK NC 27709-2211

1 CDR USA BELVOIR R&D CTR
ATTN STRBE WC
TECH LIBRARY (VAULT)
BLDG 315
FT BELVOIR VA 22060-5606

1 CDR
US ARMY TRAC FT LEE
DEFENSE LOGISTICS STUDIES
FT LEE VA 23801-6140

1 PRESIDENT
US ARMY ARTILLERY BOARD
FT SILL OK 73503

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	CMDT USA CMD & GENERAL STAFF COLLEGE FT LVN WORTH KS 66027-5200
1	CMDT USA SPECIAL WARFARE SCHOOL ATTN REV & TNG LIT DIV FT BRAGG NC 28307
1	RADFORD ARMY AMMO PLANT ATTN SMCRA QA HI LIBRARY RADFORD VA 24141
1	CMDT USA FIELD ARTILLERY SCHOOL ATTN STSF TSM CN FT SILL OK 73503-5600
4	DEP CDR STRATEGIC DEF CMD ATTN SFAE SD HVL S SMITH LTC KEE D LIANOS T ADEN PO BOX 1500 HUNTSVILLE AL 35887-8801
3	CDR US ARMY FOREIGN SCIENCE & TECH CTR ATTN AMXST MC 3 S LEBEAU C BEITER 220 SEVENTH ST NE CHARLOTTESVILLE VA 22901
1	CMDT US ARMY FIELD ARTILLERY CTR & SCHOOL ATTN ATSF CO MW B WILLIS FT SILL OK 73503
1	NAVAL SEA SYSTEM CMD DEPT OF THE NAVY ATTN CSEA CDR DAMPIER 06KR12 WASH DC 20362-5101
1	OFC OF NAVAL RSCH ATTN CODE 473 R S MILLER 800 N QUINCY ST ARLINGTON VA 22217

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
2	CDR NAVAL SEA SYSTEMS CMD ATTN SEA 62R SEA 64 WASH DC 20362-5101
1	CDR NAVAL AIR SYSTEMS CMD ATTN AIR 954 TECH LIBRARY WASH DC 20360
1	NAVAL RSCH LAB TECH LIBRARY WASH DC 20375
2	CDR NSWC ATTN J P CONSAGA C GOTZMER SLVR SPRING MD 20902-5000
2	CDR NSWC ATTN K KIM CODE R 13 R BERNECKER CODE R 13 SILVER SPRING MD 20902-5000
3	CDR NSWC INDIAN HEAD DIV ATTN 610 C SMITH 6110J K RICE 6110C S PETERS INDIAN HEAD MD 20640-5035
6	CDR NSWC DAHLGREN DIV ATTN CODE G33 T DORAN J COPLEY CODE G30 GUNS & MUNITIONS CODE G301 D WILSON CODE G32 GUNS SYSTEMS DIV CODE E23 TECH LIBRARY DAHLGREN VA 22448-5000
1	CDR NSWC INDIAN HEAD DIV ATTN CODE 270P1 ED CHAN 101 STRAUS AVE INDIAN HEAD MD 20640
1	CDR NSWC INDIAN HEAD DIV ATTN CODE 3120 MR R RAST 101 STRAUS AVE INDIAN HEAD MD 20640

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	CDR NSWC INDIAN HEAD DIV ATTN CODE 210P1 R SIMMONS 101 STRAUS AVE INDIAN HEAD MD 20640
2	CDR NSWC INDIAN HEAD DIV ATTN CODE 6210 SHARON BOYLES NORBERTO ALMEYDA 101 STRAUS AVE INDIAN HEAD MD 20640
1	NAVAL AIR WARFARE CTR ATTN CODE 3891 MR CHAN PRICE CHINA LAKE CA 93555
1	NAVAL AIR WARFARE CTR ATTN CODE 3891 MS ALICE ATWOOD CHINA LAKE CA 93555
1	CDR NAVAL WEAPONS CTR ATTN CODE 388 C F PRICE INFO SCIENCE DIV CHINA LAKE CA 93555-6001
1	OLAC PL TSTL ATTN D SHIPLETT EDWARDS AFB CA 93523-5000
10	CIA OFC OF CENTRAL REF DISSEMINATION BR RM GE 47 HQS WASH DC 20502
1	CIA ATTN J E BACKOFEN HQ RM 5F22 WASH DC 20505

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
5	DIR SNL ATTN T HITCHCOCK R WOODFIN D BENSON S KEMPKA R BEASLEY ADV PROJECTS DIV 14 ORGANIZATION 9123 ALBUQUERQUE NM 87185
2	DIR LANL ATTN B KASWHIA H DAVIS LOS ALAMOS NM 87545
1	DIR LLNL ATTN M S L 355 A BUCKINGHAM PO BOX 808 LIVERMORE CA 94550
2	DIR SNL COMBUSTION RSCH FAC ATTN R ARMSTRONG S VOSEN DIV 8357 LIVERMORE CA 94551-0469
1	UNIV OF ILLINOIS DEPT OF MECH INDUST ENGR ATTN PROF HERMAN KRIER 144 MEB 1206 N GREEN ST URBANA IL 61801
1	JPU/CPIA ATTN T CHRISTIAN 10630 LTLE PATUXENT PKWY SUITE 202 COLUMBIA MD 21044-3200
1	STATE UNIV OF NEW YORK DEPT OF ELECTRICAL ENGR ATTN DR W J SARGEANT BONNER HALL RM 312 BUFFALO NY 14260

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	THE JOHNS HOPKINS UNIV APPLIED PHYSICS LAB CPIA JOHN HOPKINS RD LAUREL MD 20707
1	PENN STATE UNIV PROPULSION ENGR RSCH CTR ATTN DR KENNETH K KUO 140 RSCH BLDG E UNIV PARK PA 16802
1	TEXAS TECH UNIV DEPT OF EE COMPUTER SCI ATTN DR M KRISTIANSEN LUBBOCK TX 79409-4439
1	UNIV OF TEXAS AT ARLINGTON DEPT OF ELECTRICAL ENGR ATTN DR LOYD B GORDON BOX 19016 ARLINGTON TX 76019-0016
3	WILKES UNIV DEPT OF ELECTRICAL ENGR ATTN DR AR ARMAND CHAIRMAN EE DEPT DR Y CHOE DR T SRINIVASAN WILKES BARRE PA 18766
2	PENN STATE UNIV DEPT OF MECHANICAL ENGR ATTN JEFF BROWN 312 MECHANICAL ENGR BLDG UNIV PARK PA 16802
1	NCSU ATTN JOHN G GILLIGAN BOX 7909 1110 BURLINGTON ENGR LABS RALEIGH NC 27695-7909
2	INSTITUTE FOR ADV STUDIES ATTN DR H FAIR DR T KIEHNE 4030 2 WEST BAKER LANE AUSTIN TX 78759-5329

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	SRI INTL PROPULSION SCIENCES DIV ATTN TECH LIBRARY 333 RAVENSWOOD AVE MENLO PARK CA 94025
1	SPARTA ATTN DR MICHAEL HOLLAND 9455 TOWNE CTR DR SAN DIEGO CA 92121-1964
5	FMC CORP ATTN MR G JOHNSON MR M SEALE DR A GIOVANETTI MR J DYVIK DR D COOK 4800 EAST RIVER RD MINNEAPOLIS MN 55421-1498
2	HERCULES INC RADFORD ARMY AMMO PLANT MGR MFG ENGR DEPT ATTN D A WORRELL EDWARD SANFORD PO BOX 1 RADFORD VA 24141
1	HERCULES INC ATTN DR R CARTWRIGHT 100 HOWARD BLVD KENVIL NJ 07847
4	OLIN ORDNANCE ATTN V MCDONALD LIBRARY HUGH MCELROY MR THOMAS BOURGEOIS MR DENNIS WORTHINGTON PO BOX 222 ST MARKS FL 32355
1	PAUL GOUGH ASSOC INC ATTN P S GOUGH 1048 SOUTH ST PORTSMOUTH NH 03801-5423
1	PHYSICS INTL LIBRARY ATTN H WAYNE WAMPLER PO BOX 5010 SAN LEANDRO CA 94577-0599

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
2	ROCKWELL INTL ROCKETDYNE DIV ATTN BA08 J E FLANAGAN J GRAY 6633 CANOGA AVE CANOGA PARK CA 91304
2	SCIENCE APPLICATIONS INC ATTN J BATEH L THORNHILL 1519 JOHNSON FERRY RD SUITE 300 MARIETTA GA 30062-6438
1	ELI FREEDMAN & ASSOC ATTN E FREEDMAN 2411 DIANA RD BALTIMORE MD 21209
1	ROCKETDYNE ATTN MR OTTO HEINEY MAIL STOP BA26 6633 CANOGA AVE CANOGA PARK CA 91304
1	THIOKOL (LONGHORN DIV) ATTN DR DAVID DILLEHAY MAIL STOP 703 11 PO BOX 1149 MARSHALL TX 75671
1	THIOKOL (ELKTON DIV) ATTN DR RODNEY WILLER 55 THIOKOL RD ELKTON MD 21922
1	VERITAY TECH INC ATTN MR E FISHER 4845 MILLERSPORT HIGHWAY E AMHERST NY 14051-0305
1	VERITAY TECH INC 4845 MILLERSPORT HWY PO BOX 305 E AMHERST NY 14051-0305
1	BATTELLE TWSTIAC 505 KING AVE COLUMBUS OH 43201-2693

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
2	CAL INSTITUTE OF TECH JPL ATTN L D STRAND MS 125 224 D ELLIOT 4800 OAK GROVE DR PASADENA CA 91109
1	GENERAL ELECTRIC CO DEFENSE SYSTEMS DIV ATTN DR J MANDZY MAIL DROP 43 220 100 PLASTICS AVE PITTSFIELD MA 01201
2	SAIC ATTN MR N SINHA DR S DASH 501 OFC CTR DR FT WASH PA 19034-3211
1	SAIC ATTN DR G CHRYSSAMELLIS 8400 NORMANDELE BLVD SUITE 939 MINNEAPOLIS MN 55437
1	HERCULES INC ATTN DR R CARTWRIGHT 100 HOWARD BLVD KENVIL NJ 07847
1	SNL ATTN MR MARK GRUBELICH DIV 2515 PO BOX 5800 ALBUQUERQUE NM 87185
1	IMI SERVICES USA ATTN MR G RASHBA 2 WISCONSIN CIRCLE SUITE 420 CHEVY CHASE MD 20815
1	SAIC ATTN DR KEITH JAMISON 1247 B NORTH EGLIN PKWY SHALIMAR FL 32579
1	ENGR RES CORP OF AMERICA ATTN MR R A HILL PO BOX 161 LINTHICUM MD 21090

NO. OF
COPIES ORGANIZATION

ABERDEEN PROVING GROUND

12 CDR USACSTA
 ATTN S WALTON
 G RICE
 D LACEY
 C HERUD
 STECS DA ID
 MR WALLACE
 DR FRANCIS
 STECS AA AE
 MR MARTIN
 CPT BROWNING
 STECS AA AE T KHONG (4 CP)

45 DIR USARL
 ATTN AMSRL WT P A HORST
 AMSRL WT PA
 T MINOR
 K WHITE
 D GORDNER
 M DELGUERCIO
 J DESPIRITO
 T ROSENBERGER
 I STOBIE
 B OBERLE
 P TRAN
 G WREN
 A BIRK
 M MCQUAID
 J KNAPTON
 A JUHASZ
 P REEVES
 T COFFEE
 G KATULKA (10 CP)
 A ZIELINSKI
 AMSRL WT PD B BURNS
 AMSRL WT PC
 R FIFER
 R BEYER
 AMSRL WT PB E SCHMIDT
 AMSRL WT T W MORRISON
 AMSRL WT WC T HAUG
 AMSRL WT WD
 C HUMMER
 C HOLLANDSWORTH
 J POWELL

USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. ARL Report Number ARL-TR-698 Date of Report February 1995

2. Date Report Received _____

3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) _____

4. Specifically, how is the report being used? (Information source, design data, procedure, source of ideas, etc.) _____

5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. _____

6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) _____

CURRENT
ADDRESS

Organization

Name

Street or P.O. Box No.

City, State, Zip Code

7. If indicating a Change of Address or Address Correction, please provide the Current or Correct address above and the Old or Incorrect address below.

OLD
ADDRESS

Organization

Name

Street or P.O. Box No.

City, State, Zip Code

(Remove this sheet, fold as indicated, tape closed, and mail.)
(DO NOT STAPLE)

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS



**NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES**

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 0001, APG, MD

Postage will be paid by addressee

**Director
U.S. Army Research Laboratory
ATTN: AMSRL-OP-AP-L
Aberdeen Proving Ground, MD 21005-5066**

